

COMPLAINT

SECONDARY COMPLAINTS

Soft and inconsistent shift feed

- Low CPC Pressure
- Various symptoms depending on wear

CAUSE

Worn, eroded end plugs allow loss of critical hydraulic pressure.

CORRECTION

These Sonnax o-ringed end plugs restore correct circuit pressures. The o-ring provides additional sealing to prevent hydraulic loss.

O-Ringed End Plug Kit

For units with dual linear solenoids

98892-01K

3 End Plugs	12mm
1 End Plug	14mm
1 End Plug (No O-Ring)	15mm
5 Small O-Rings	(2 extra)
2 Large O-Rings	(1 extra)

Note: Some BMXA units have been found with plugs which have smaller diameter clip-grooves and narrower retainers as shown below. The Sonnax plugs will not work in these applications.



Also available separately

98892-01


1 End Plug w/O-Rings	12mm
----------------------	------

98892-02

1 End Plug w/O-Rings	14mm
----------------------	------

98892-03

1 End Plug (No O-Ring)	15mm
------------------------	------

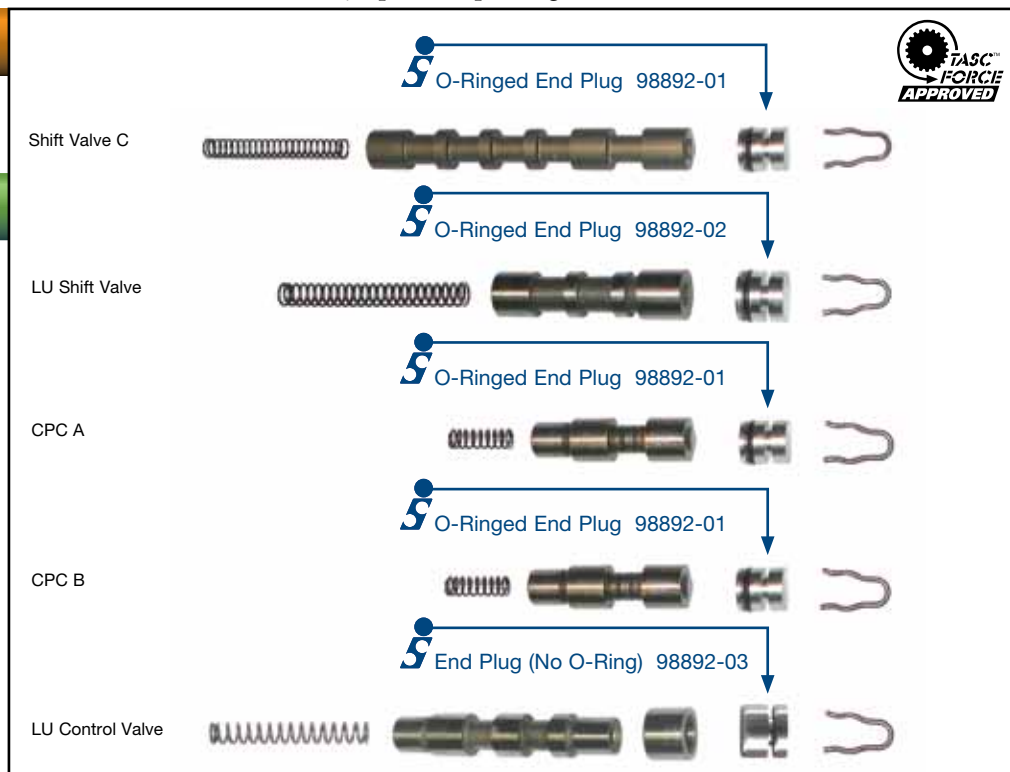

Sonnax Part Summary

Valve bore plugs on Honda/Acura valve bodies wear and allow critical CPC and solenoid feed oil to leak to exhaust, leading to low CPC pressures and soft or inconsistent shifts. Sonnax O-Ringed end plug kit **98892-01K** replaces the worn OEM end plugs and restores critical circuit pressures at the CPC A and B valves, shift valve C and LU shift valve. The kit also includes a 15mm interference fit end plug **98892-03** that does not use an O-Ring. It will fit either the lock-up control or shift valve D bores. In addition to these commonly worn locations, the end plugs **98892-01** (12mm) & **98892-02** (14mm) can be used in other valve bores as needed.

Features & Benefits

- Prevents loss of CPC & other critical oil pressures.
- Drop-in installation requires no machining or special tools.
- All end plugs and O-Ring replacement kits also sold separately.
- Can be used in other locations as needed (see chart at right).

Honda end plugs for all 4 speed units with dual linear solenoids			
Sonnax P/N	VALVE	LOCATION	DIAMETER
Included In Kit 98892-01K	CPC A	Servo VB	12mm
	CPC B	Servo VB	12mm
	Shift Valve C	Main VB	12mm
	LU Shift	Main VB	14mm
	LU Control	Main VB	15mm*

Sonnax P/N	VALVE	LOCATION	DIAMETER
98892-01	Shift Valve E	Main VB	12mm
98892-02	Reverse CPC	Main VB	14mm
98892-02	Servo Control	Main VB	14mm
98892-02	Shift Valve B	Servo VB	14mm
98892-03	LU Control	Main VB	15mm*
98892-03	Shift Valve D	Main VB	15mm*

* No O-Ring