

COMPLAINT

Damaged or excessively worn bushing journal

CAUSE


Insufficient lubrication, poor alignment or excessive loading.

CORRECTION

This forward planetary repair sleeve allows worn carriers to be salvaged with a minimal amount of machining.

Forward Planetary Repair Sleeve

36440-01
1 Repair Sleeve
1 Spring Pin

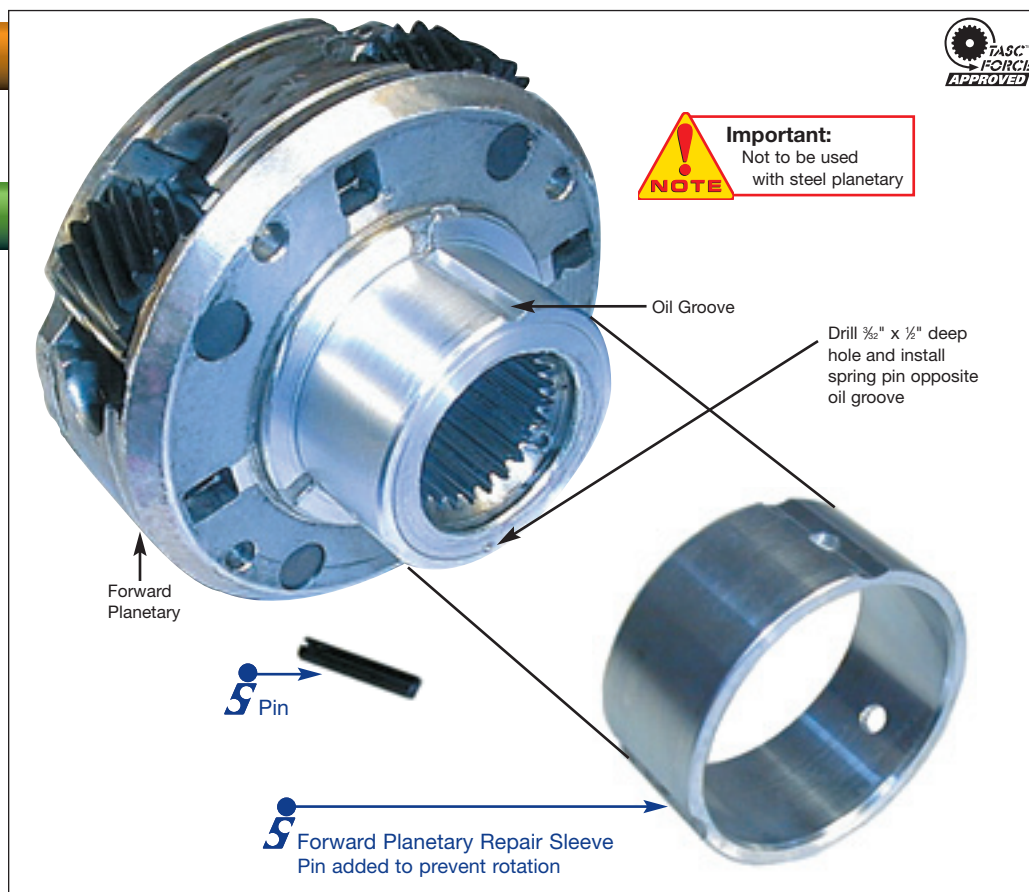

Sonnax Part Summary

The bushing journal of the Ford E4OD and C6 forward planetary carriers can become damaged or have excessive wear. This is caused by insufficient lubrication, poor alignment or excessive loading. Sonnax sleeve **36440-01** allows these worn carriers to be salvaged with a minimal amount of machining.

Features & Benefits

- Salvages worn planetaries.
- Restores alignment.
- Prevents sleeve rotation.

Note: This repair sleeve requires that the planetary carrier be turned using a lathe.

Save

\$75 in planet replacement costs