

COMPLAINT

SECONDARY COMPLAINT

OE calibration makes shift feel too soft

- Long soft shift in towing and heavy-duty applications

CAUSE

Broken, weak or collapsed accumulator springs.


CORRECTION

Replace accumulator springs with Sonnax improved shift feel accumulator spring kit.

Improved Shift Accumulator Spring Kit

36948-18K

- 3 Retaining Clips
- 2 Green Springs
- 1 Yellow Spring
- 3 Medium Red Springs
- 3 Non-Painted Springs

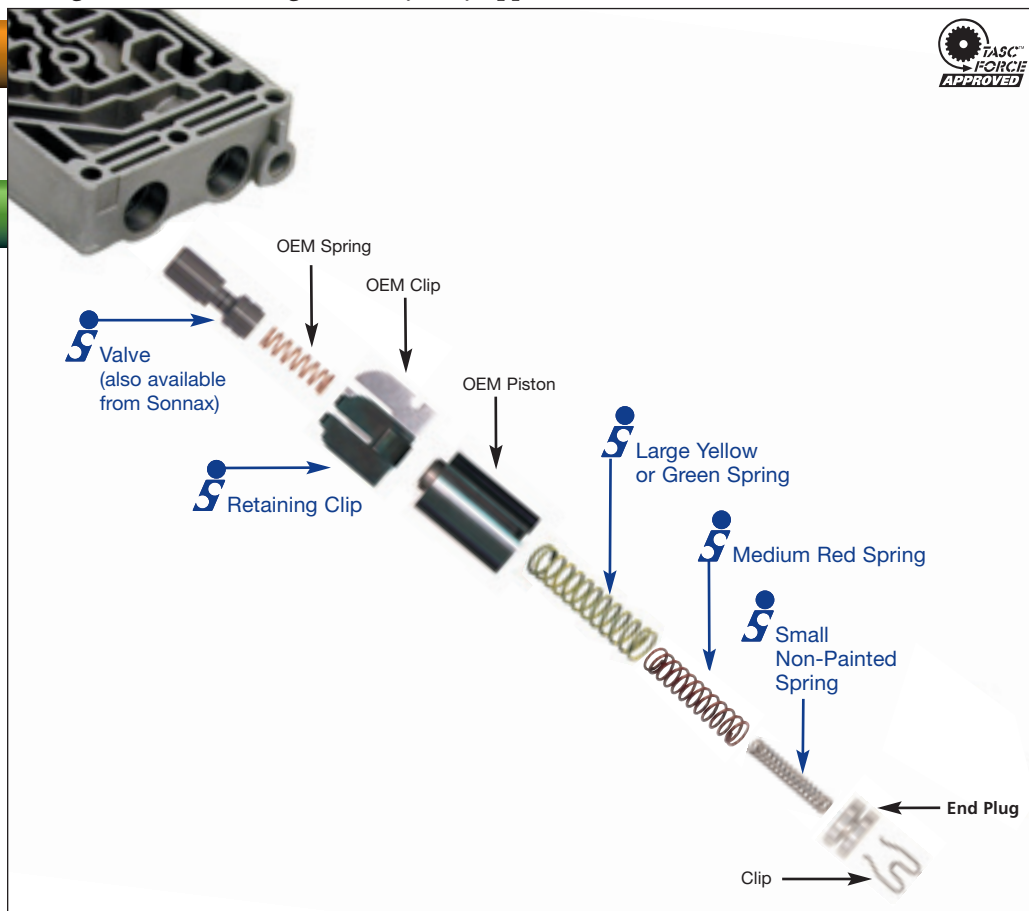

Sonnax Part Summary

The OEM E4OD and 4R100 accumulator springs can break, weaken or collapse, causing long, soft shifts, particularly in towing and heavy-duty applications.

Features & Benefits

- Best in heavy-duty and towing applications.
- Gives quicker and firmer 1-2, 2-3 and 3-4 shifts.
- Recalibrates shift feel.

Note: For best results, use in conjunction with Sonnax line pressure modulator valve **96948-01K** for heavy-duty/high performance applications.