

**COMPLAINT**

SECONDARY COMPLAINT

**Reaction carrier shaft damage**

- Bushing failure

**CAUSE**

Oil leakage due to inadequate support of the reaction sun gear.


**CORRECTION**

The Sonnax sun gear bushing is more than one-and-a-half times as wide as the OEM and maximizes bushing support.

**Wide Reaction Sun Gear Bushing**

**77010-01**

1 Wide Reaction Sun Gear Bushing

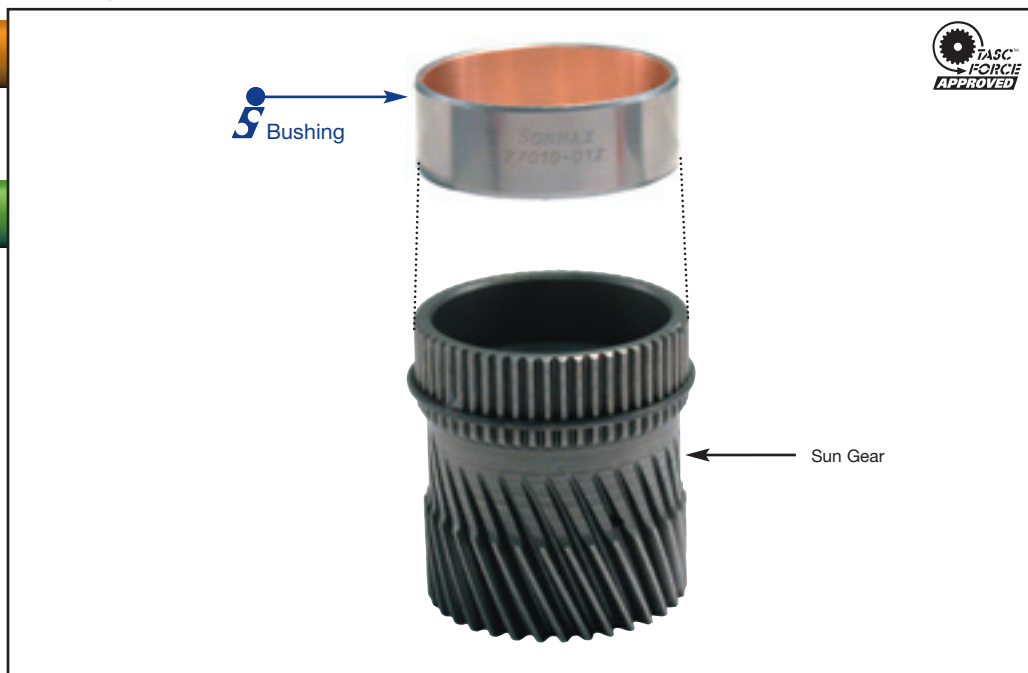

**Sonnax Part Summary**

The Sonnax replacement bushing **77010-01** is one-and-a-half times the width of the OEM version and fills the entire sun gear bushing groove. This wider bushing maximizes support. The bushing is steel-backed bronze that is precision machined to provide minimal clearance with the mating shaft.

**Features & Benefits**

- Provides better control of lube oil.
- Has more support for sun gear and reaction shell.
- Greater longevity than OE bushing.