

## COMPLAINT

SECONDARY COMPLAINTS

## High line pressure, erratic converter apply pressure

• Poor lube control • Harsh shifting

## CAUSE

A worn pressure regulator reducing sleeve allows oil leakage.


## CORRECTION

This replacement pressure regulator reducing sleeve eliminates oil loss and cross leakage.

## Pressure Regulator Reducing Sleeve

**92835-07**

1 Pressure Regulator Sleeve

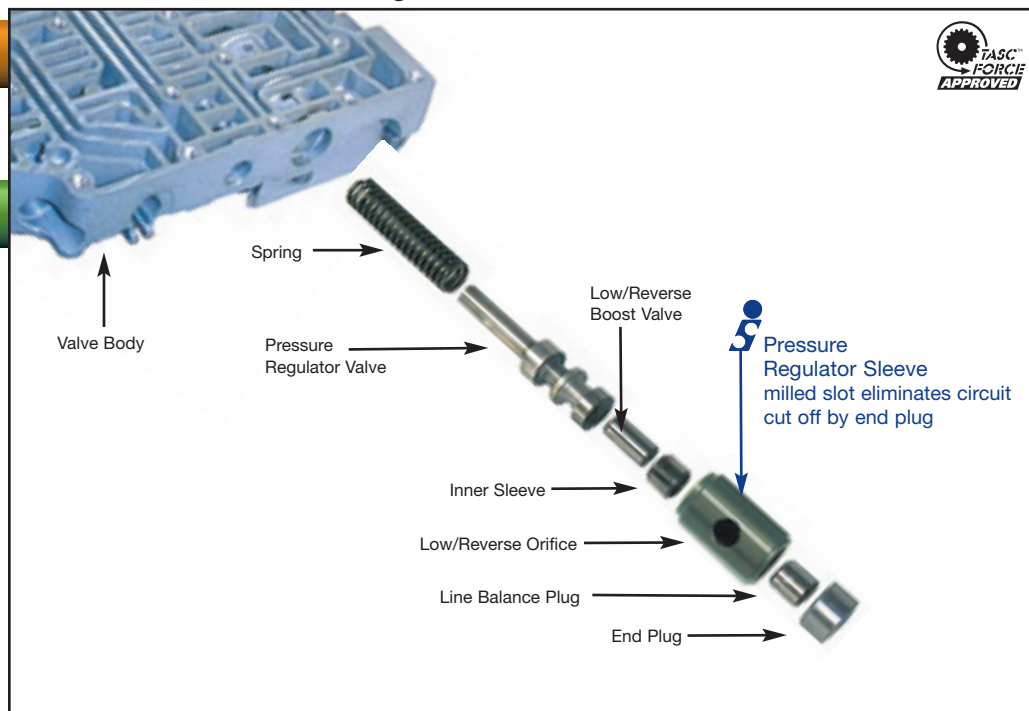

### Sonnax Part Summary

Many 41TE/42LE transmissions experience erratic line pressure which creates lube and converter clutch concerns, as well as harsh shifting. These complaints are often caused by a worn pressure regulator reducing sleeve. Sonnax now offers a replacement pressure regulator sleeve **92835-07** to prevent excessive wear.

### Features & Benefits

- Sleeve is made of hard-coat anodized aluminum to resist wear.
- Tight tolerances eliminate oil loss and cross leakage.
- The sleeve has been improved over OEM to prevent incorrect positioning and eliminate circuit cut-off.