

COMPLAINT

SECONDARY COMPLAINT

Lower sun gear shell bushings wear prematurely

- Loss of lube oil

CAUSE

OEM and aftermarket bushings are too narrow for application.


CORRECTION

This wider bushing gives more support and reduces shaft-to-bushing clearance.

Upgraded Front Sun Gear Shell Bushing

96009-01

1 Bushing

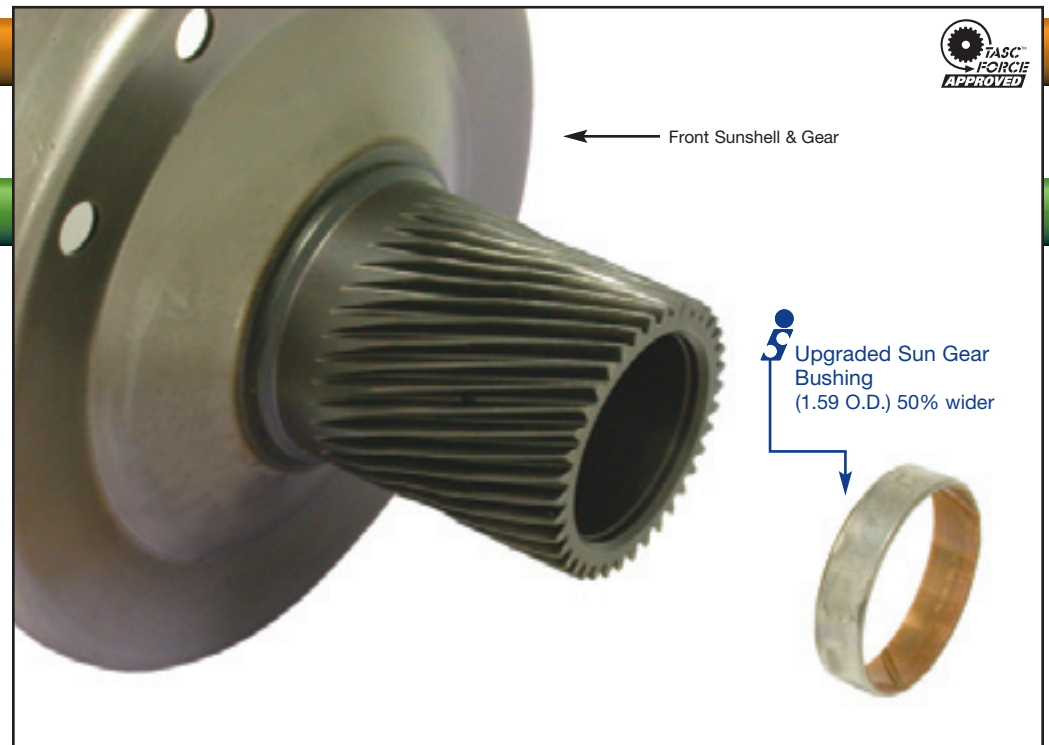

Sonnax Part Summary

In vehicles with AXOD & E ('88-'92) transmissions it is common for the lower sun gear bushing to wear. The sun gear holds two bushings, an upper and lower bushing. The upgraded Sonnax bushing **96009-01** replaces the lower and upper sun gear bushings.

Features & Benefits

- The Sonnax bushing is 50% wider for better support.
- Bushing has less bushing-to-shaft clearance than other available bushings.

Note: Beginning in 1989 the upper bushing was used only to control oil flow, and is not used to support the sun gear.