

Chrysler 42-46-47-48RH/RE

sonnax®

TIME TESTED • INDUSTRY TRUSTED®

1 Automatic Drive • P.O. Box 440 • Bellows Falls, VT 05101-0440 USA
(800) 843-2600 • (802) 463-9722 • F: (802) 463-4059 • www.sonnax.com

- 1 22771A-01**
4-Spool Switch Valve
22771A-13
Oversized 4-Spool Switch Valve

Helps cure:

- Lockup shudder
- Overheated converter

Note: 22771A-13 Requires tool kit 22771A-TL13.

- 2a 22771-19K**
Oversized Lockup
Boost Valve Kit

Fits '90-Later with Boost Oil Delivery Tube Only

Helps cure:

- TCC slip under load
- No line rise during TCC apply in 4th

Note: Requires tool kit F-22771-TL19 & the VB-FIX reaming fixture.

- 2b 22990-01**
Boost Valve Spring Retainer

Helps cure:

- Transmission slips
- Leakage of 4th gear

- 3a 22771A-02K**
Lube Regulated Pressure
Regulator Valve


- 3b 22771A-07K** Fits 42/46/47RH/RE Only

- 3c 22771A-16K**
Oversized Pressure
Regulator Valve Kit

Helps cure:

- Delayed engagement
- Lube failures

Note: 22771A-07K & 22771A-16K Require tool kit F-22771A-TL7 & the VB-FIX reaming fixture.

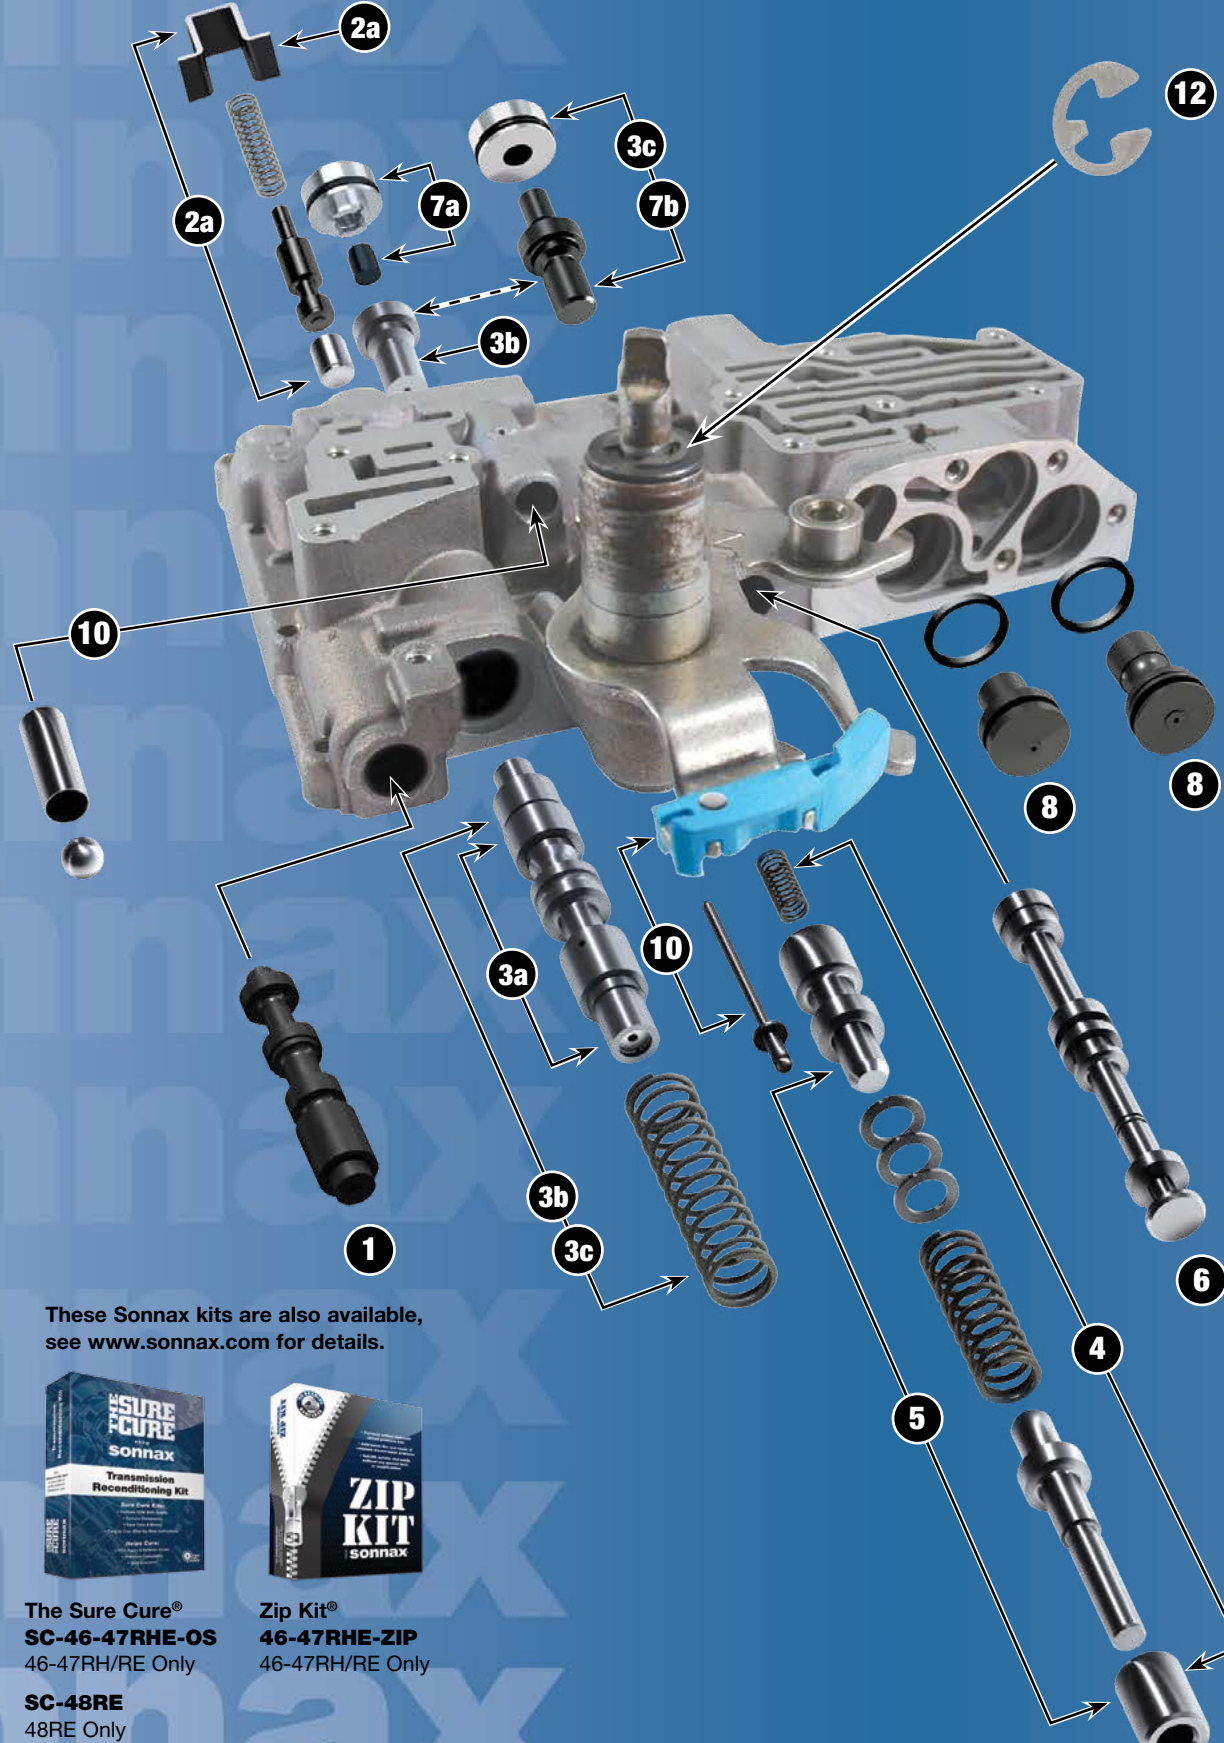

These Sonnax kits are also available, see www.sonnax.com for details.




The Sure Cure®
SC-46-47RHE-OS
46-47RH/RE Only

SC-48RE
48RE Only

SC-42RHE
42RH/RE Only



Zip Kit®
46-47RHE-ZIP
46-47RH/RE Only

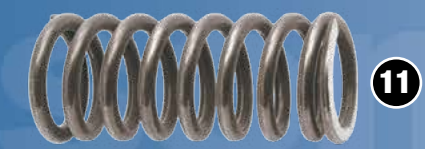

- 4 22771-03K** .200" Plug Dia.
Throttle Valve Kit

- 4 22771-HDK3**
Heavy Duty Throttle Valve Kit

- 5 22771-04K** .264" Plug Dia.
Oversized Throttle
Valve Kit

Helps cure:

- Shift timing concerns
- Throttle buzz
- HD Kit Only: Reduces throttle sensitivity

Note: Only 22771-04K requires tool kit F-22771-TL & the VB-FIX reaming fixture.

- 6 22771-09**
Manual Valve

Helps cure:

- Delayed engagement
- Converter bushing failure

- 7a 22229-01K** .200" Plug Dia.,
Fits 42-46-47RH/RE Only

- 7a 22229-04K** .264" Plug Dia.,
Fits 42-46-47RH/RE Only)

- 7b 22771A-19K** Fits 48RE Only
Line Pressure Plug & Sleeve Kit

Helps cure:

- Slips in Reverse
- Poor cooler charge at idle

- 8 22771-14K**
Governor Bore Plug Kit

Helps cure:

- 1-2 Shuttle shift
- Sensitive 2-3 & 3-2 shifts

- 9 22771-12K**
Valve Body Detent Ball
& Sleeve Kit

Helps cure:

- No start
- Delayed engagements

Note: 22771-12K Requires tool kit 22771-TL12.

- 10 22229-03** Fits '02-Earlier with
3-Terminal Switch Only

- 22229-07K** Fits '01-Later with
Digital Range Sensor Only

- Neutral Safety Backup
Insulator Service Kit

Helps cure:

- Missing, cracked or broken insulators

- 11 12861-01**
3-4 Accumulator Spring

Helps cure:

- Sluggish shifts

- 12 10000-03K**
E-Ring